

ProGuard® Mobile Air Purifier


*Rapidly Cleans the Air,
Destroys Airborne Viruses*

ProGuard® Mobile Air Purifier safely destroys airborne contaminants including viruses, bacteria, volatile organic compounds and mold with no installation or ducting required!

This new air purifying solution produces 1,200 CFM of clean air for facilities such as:

- Healthcare
- Restaurants
- Offices
- Schools & Universities
- Senior Living
- Retail Spaces
- Manufacturing Facilities
- Fitness Centers
- Dental Offices

ProGuard® Mobile Air Purifier uses safe chemical and particulate filtration for effective air purification. Gas-phase media made up of 50% activated carbon and 50% potassium permanganate that removes odors and harmful chemicals.

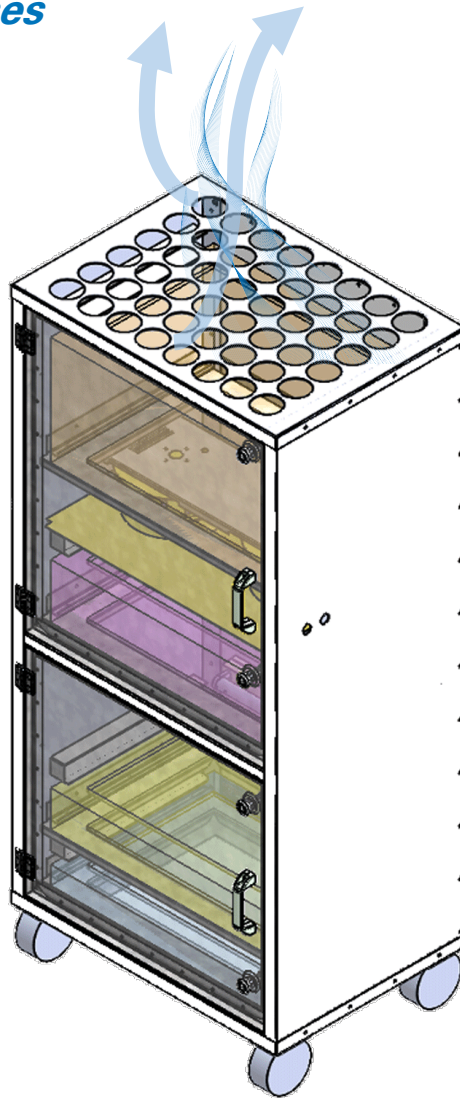


Stage 5




24"x24"x2" MERV 8 final filter to ensure the capture of any remaining particulates.

Stage 4




Gas-phase filter that is 50:50 activated carbon and potassium permanganate.

Stage 3



24"x24"x4" MERV 11 with high dust holding capacity for extended life and low pressure drop.

Stage 2



Two germicidal UV-C lights installed to deactivate viruses, bacteria and mold.

Stage 1



24"x24"x2" MERV 8 with 100% synthetic fiber media that prevents microbial growth.

*Innovative technology delivering
exceptional air quality for over 15 years*

Contact Us to Order
+1-847-676-1894
sales@promarkassociates.com



ProMark ASSOCIATES, INC.

Engineering Pure Air™

promarkassociates.com

ProGuard® Mobile Air Purifier

Model #: PG-MAP-1200

Industrial Strength, 5 Stage Air Purification


Centrifugal fans move air across 5 stages of air purification, including 1 stage of germicidal UV-C. Double wall steel construction for maximum sound proofing and sturdy construction. Portable design with durable casters for ease of mobility. Plug and play simplicity, no installation required! Straightforward design with continuously adjustable fan speed and easy access to replace standard sized filters and UV-C lamps.



Technical Specifications

Color	White
Material	Galvanized Steel
Weight	284 lbs.
Noise Level	22 dB
Fan Capacity	1200 CFM
Power	330 W
Amps	2.9 A
Electrical	115-127 V, Single Phase, 60 Hz

**Global electrical configurations available*

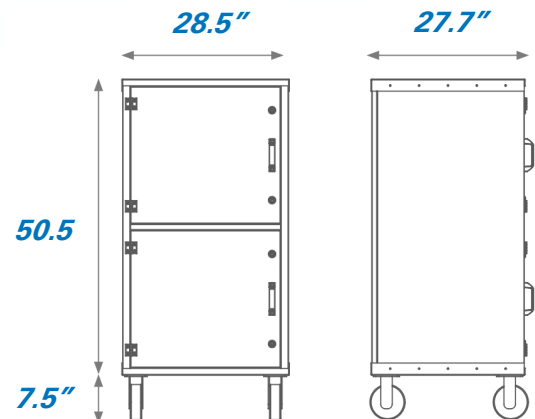

Shipping Specifications

- Palletized for protection and efficient delivery
- Pallet Dimensions: 22.8" x 22.8" x 62.2"
- Pallet Weight: 339.5 lbs.

Contact Us to Order

+1-847-676-1894

sales@promarkassociates.com



ProMark Associates, Inc.

Engineering Pure Air™